


The specification of CD15.625-15.625 curtain LED screen for outdoor DIP series

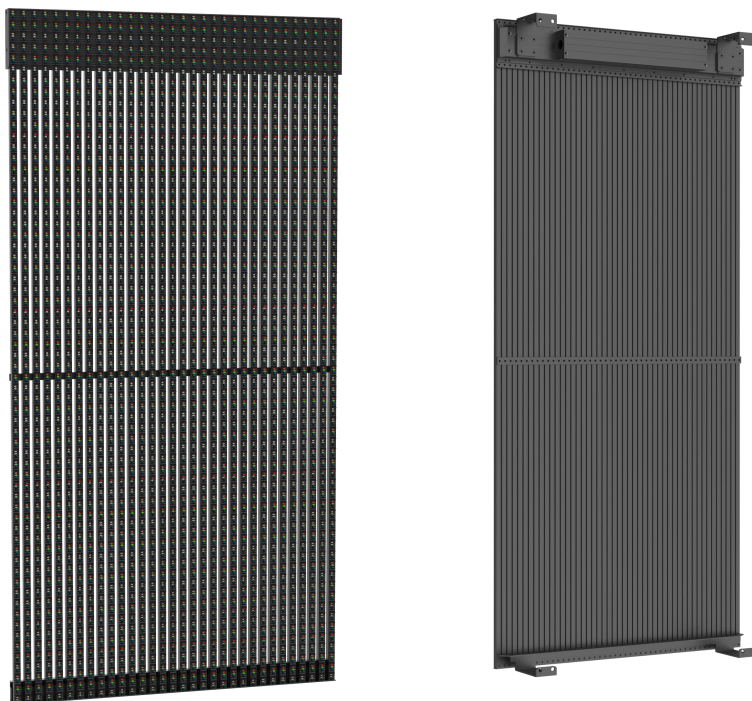


Screen specification parameter


Item	Unit	Parameter
Type of product		CD15.625-15.625
Pixel pitch	mm	Horizontal 15.625 Vertical 15.625
Pixel composition	DIP	346 (1R1G1B)
Resolution	dot/m ²	4096
Unit cabinet size	mm	500(W) X 1000(H)
Unit cabinet pixels	dot	2048
Unit cabinet resolution	dot	32(W) X 64(H)
Unit cabinet weight	kg/个	10
Cabinet weight	kg/m ²	20
Unit cabinet thickness	cm	6.7
Installation thickness	cm	12.7

Max consumption	W/m ²	580
Average consumption	W/m ²	130
Screen brightness	CD/m ²	≥8000cd
Gray lever	bit	14
Color temperature	K	6500-9300k
Brightness adjustment	degree	0-255
View angle	°	Horizontal ≥110° vertical ≥70°
The best view distance	m	15-300
Frame rates	Hz	60
Control mode		Synchronous mapping / Asynchronous control
Drive mode		Constant current,static
Power source voltage	AC V	85-250
Life span		100000 hours
Cooling mode		structure-enhanced,natural convection
Strip width	mm	9.8
Strip material		aluminum 6061
Transparent rate	%	37%
IP rate	IP	Double-side IP65
Operating / Storage Temperature	°C	-35 ~ + 80°C / -55 ~ + 120°C
Installation type		quick installation Tool-free
Fire resistance		Full V0 flame retardant
Maintain speed		10S/unit
Maintain mode		Front side and Back side


Product Details Display

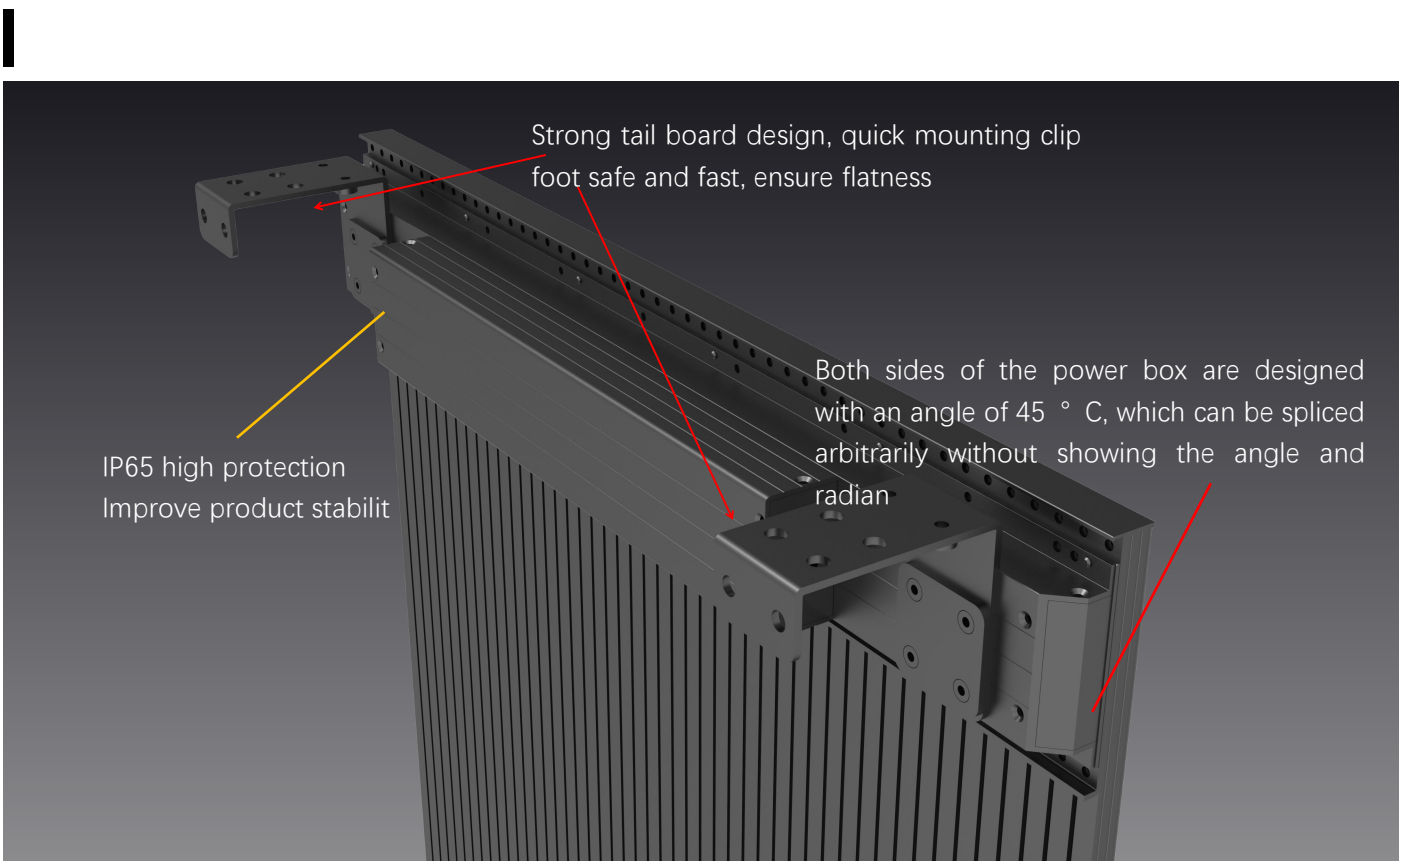

Unique heat sink design
speed up the heat conduction
so that LED mesh is stable operation

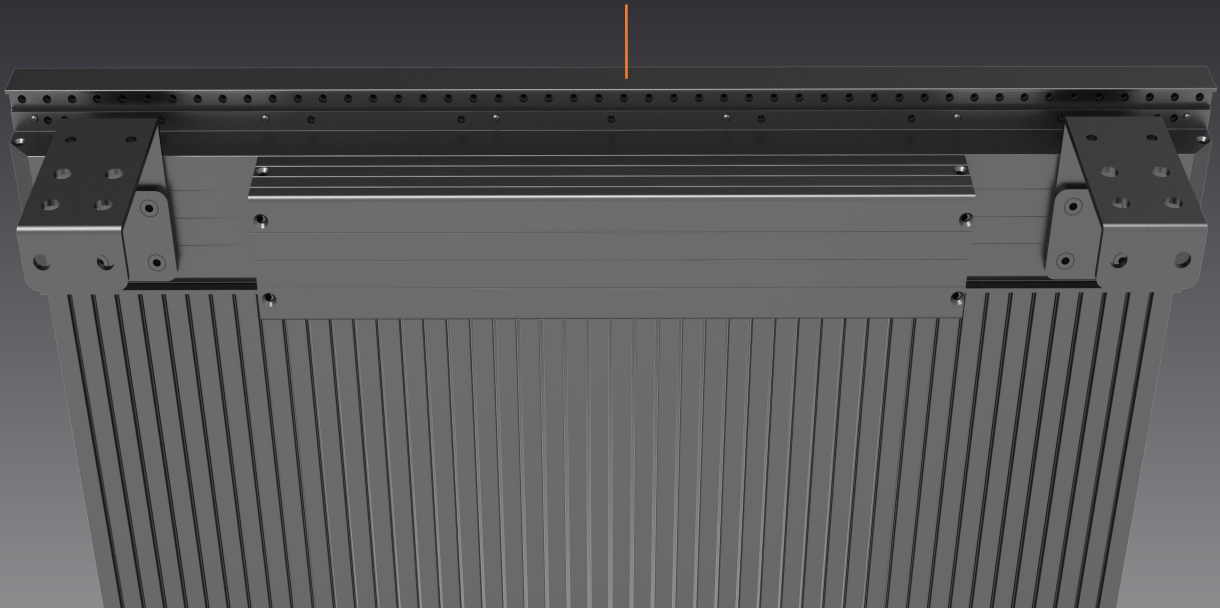

Strong tail board design
Quick mounting clip foot
Safe and fast
Ensure flatness

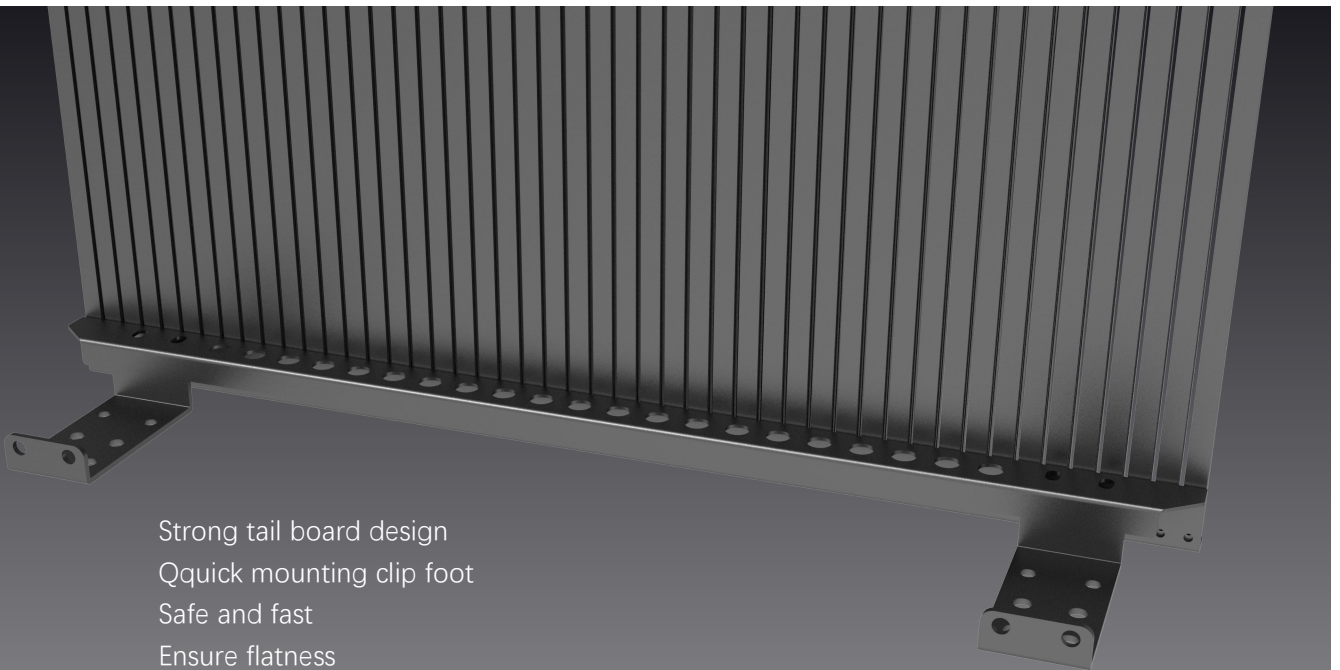


Product Installation Diagram




1.Install the steel frame horizontally on the wall according to the installation construction drawing.



2.Install the grille screen box from bottom to top

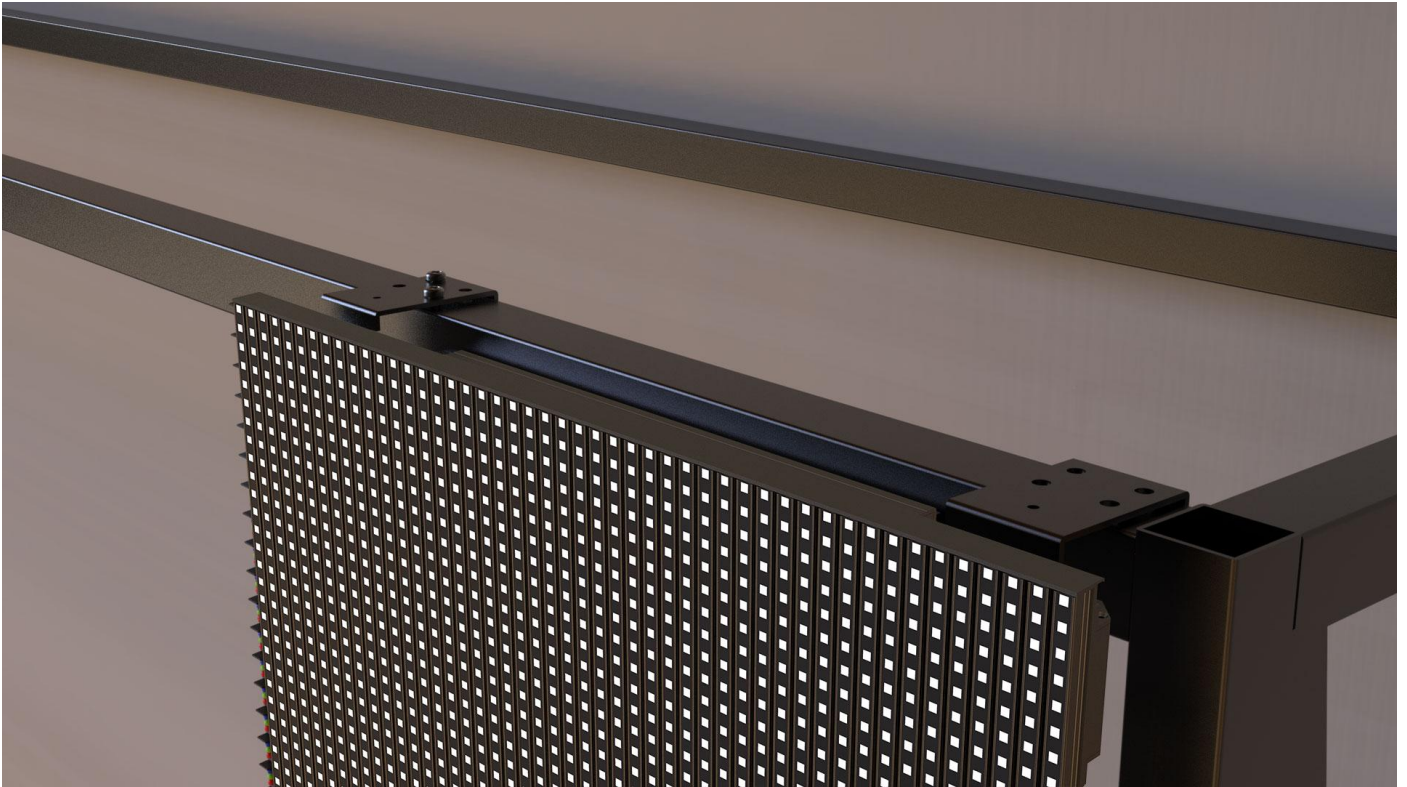


3. Use self-tapping screws to fix the holes on the top of the grille screen.

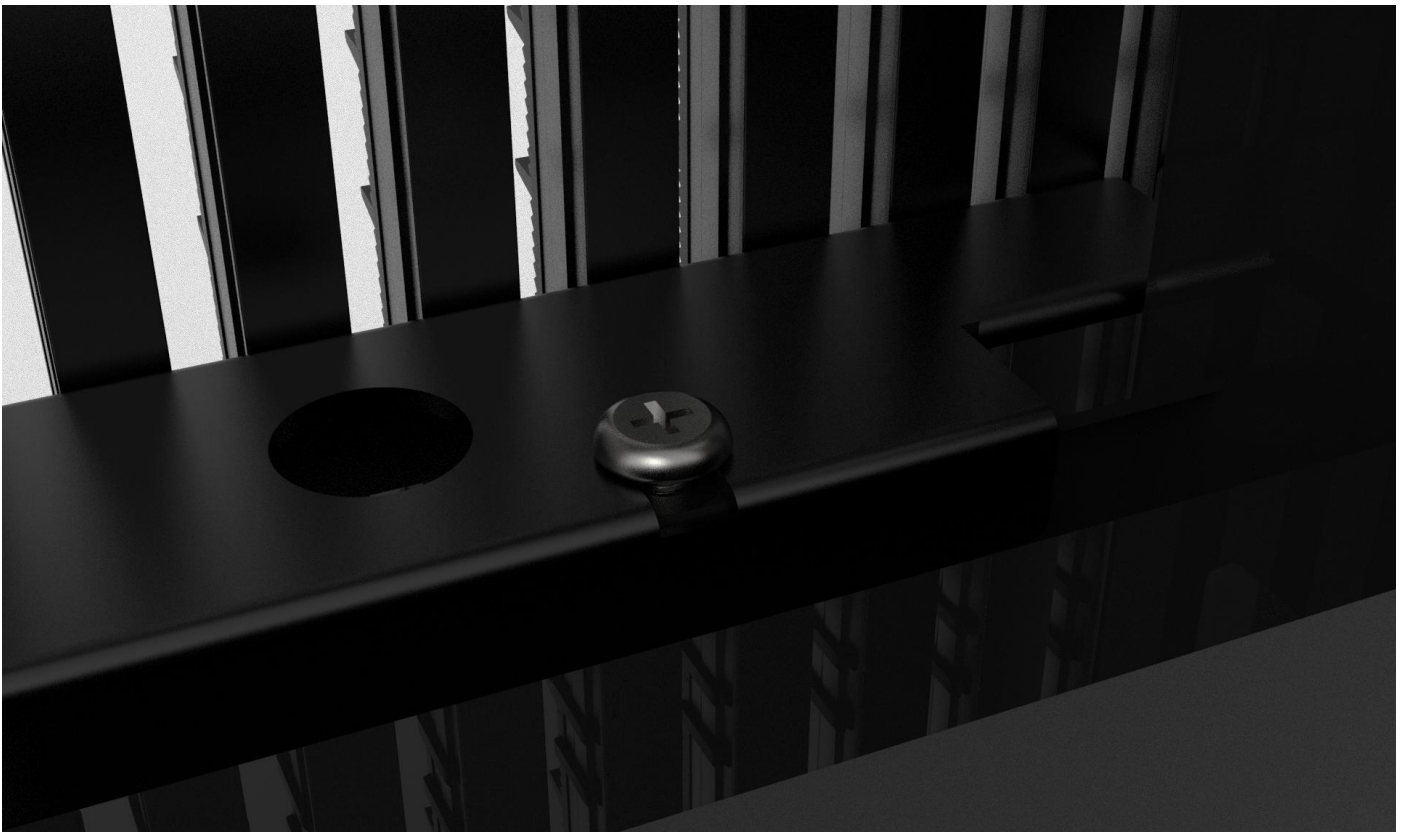


4.Use self-tapping screws to fix the holes under the grille screen

box.

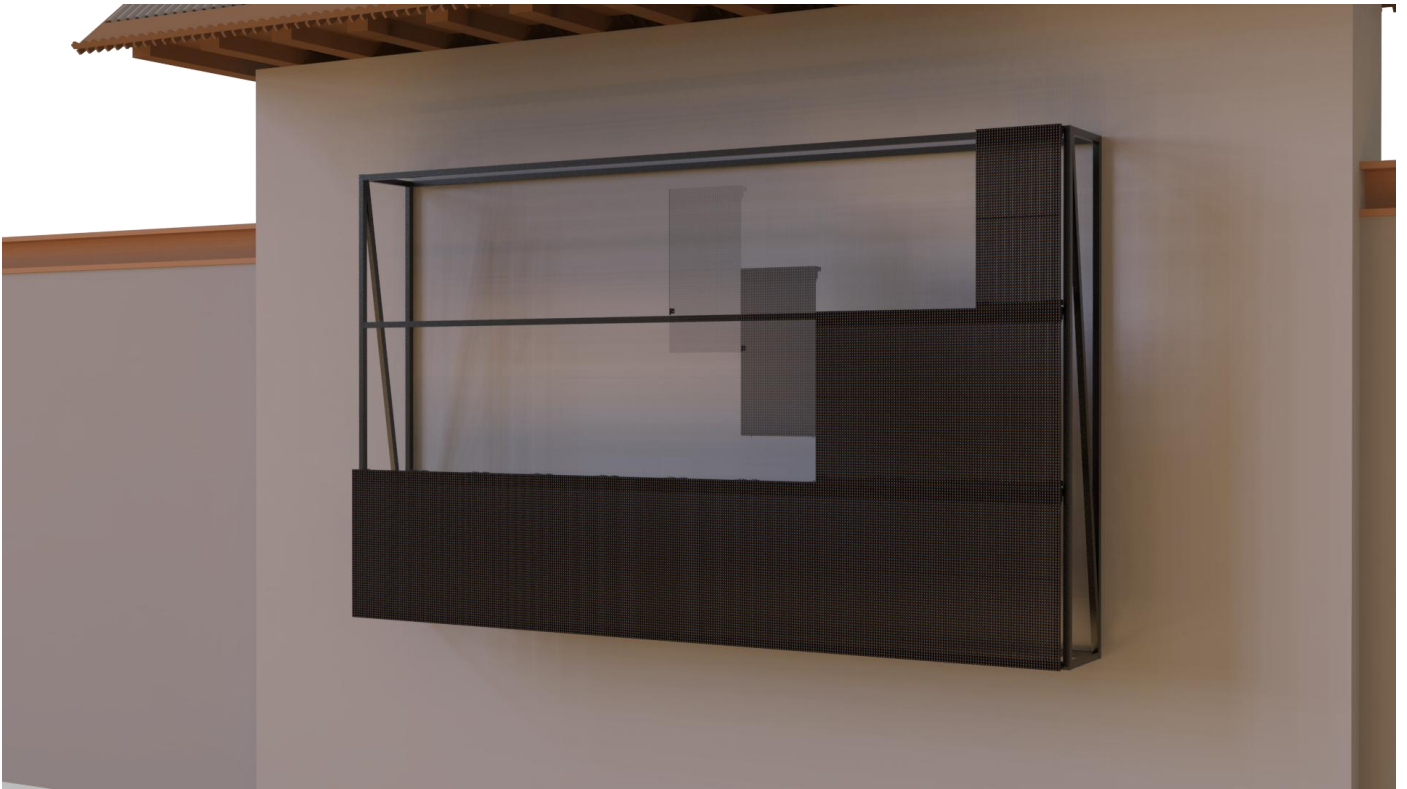

5.Install the remaining grille screen cabinets in sequence.

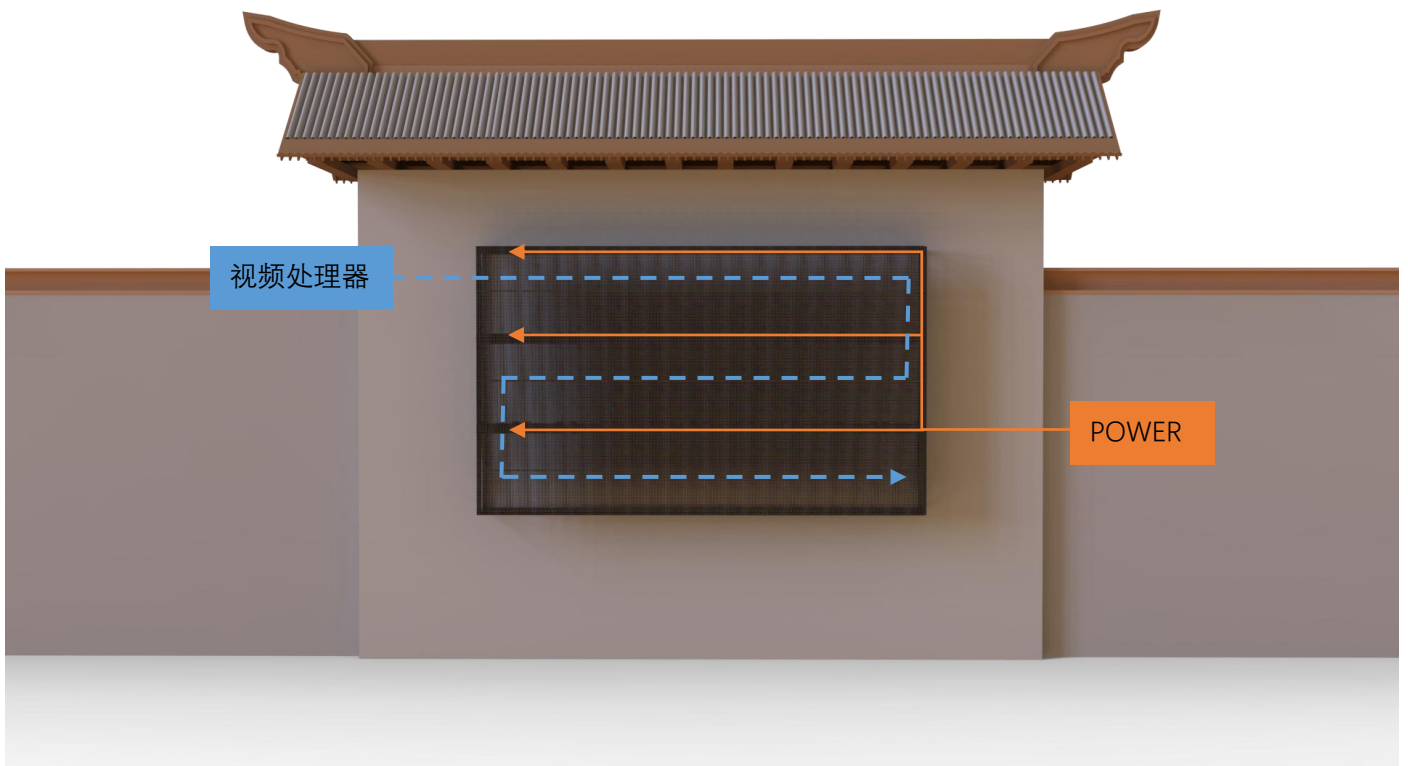


6. Connect the power cable and network cable to complete the installation.

(For details, see the product installation manual and installation video)

Product Details

P10

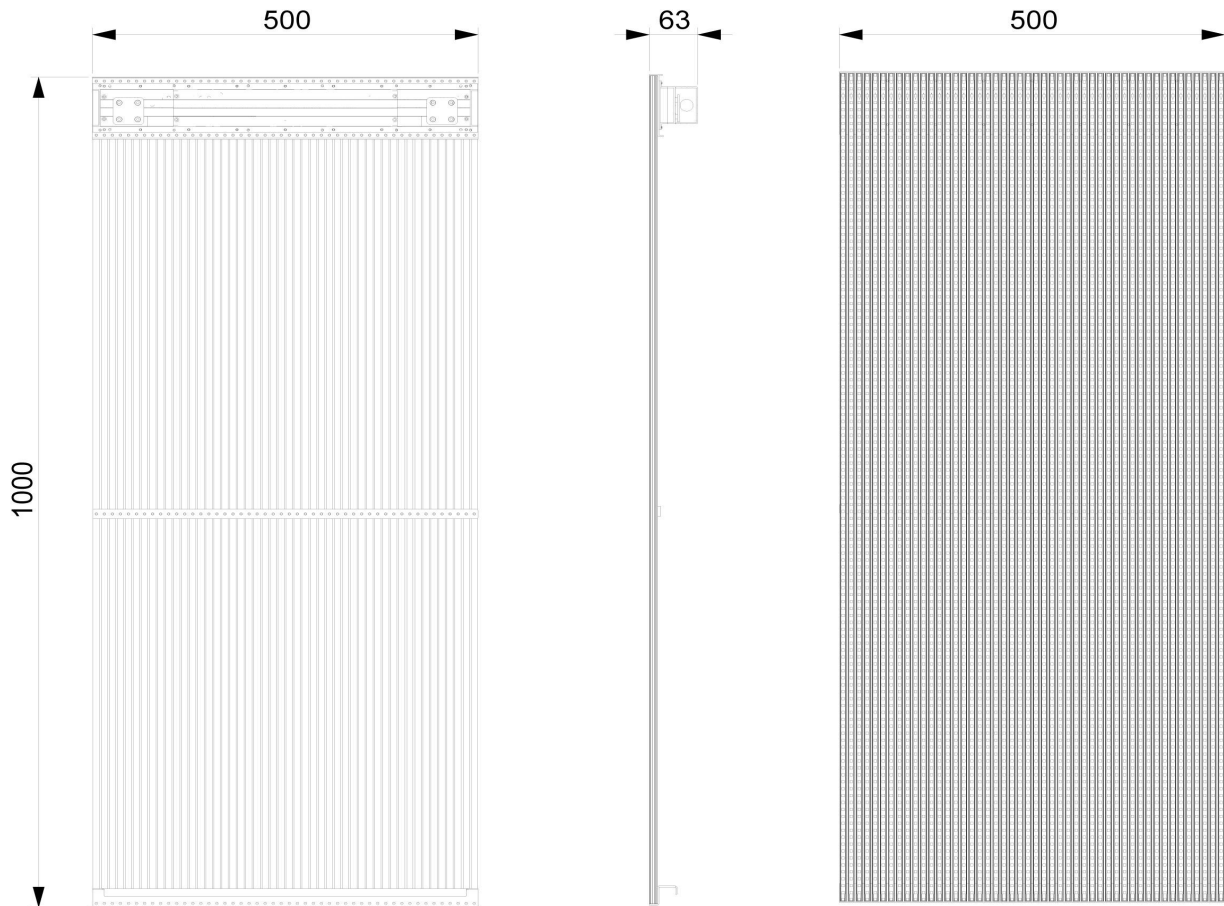

Product features



