


## LFFS-P6 front outdoor maintenance led display



### Cabinets:

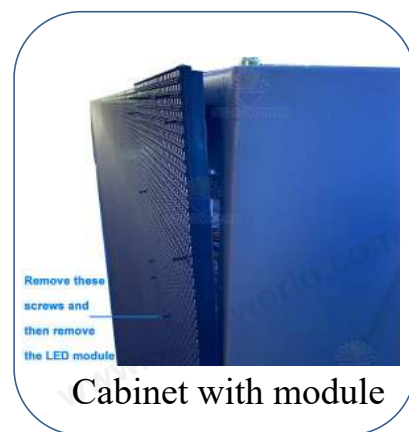

### Features:

- Space-saving, without service access at the backside;
- Thinner steel structure;
- Lighter steel structure;
- Beautiful appearance;
- Easy to install;
- Save materials;
- Cost-effective;



## Application:

outdoor advertising  
  government project  
  athletic contest  
  Shopping Guide  
  commercial real estate

## Technical Specifications:

Pixel Pitch	P6
LED type	SMD2727
Pixel configuration	3-in-1 SMD
Pixel density	27,777 pixels/m <sup>2</sup>
Module dimension(W*H)	192*192mm
Module resolution	32*32dots
Drive Method	1/8 scan
Cabinet size (W*H)	1152*1152mm or Customized
Cabinet depth	136mm
Cabinet material	Iron or aluminum
Cabinet weight	52kg/pcs
Brightness	≥5500 cd/m <sup>2</sup>
Best Viewing Distance	6m to 60m
Viewing Angle	140 * 140
Grey Level	14 Bit
Refresh Rate	≥1920HZ
Power consumption(Avg.)	320 w/sqm
Power consumption(Max.)	980 w/sqm
Humidity-operating	10% ~ 95%
Operating Temperature	-20° - 50° C
Screen life	≥100000 hours
Controlling System	Synch or Async
Certificates	CE,RoHs,FCC,UL
Ingress Protection (IP)	IP65
Warranty	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.