


## RF500-P2.976 indoor Series indoor Rental LED Display




### Module & cabinet:



Back

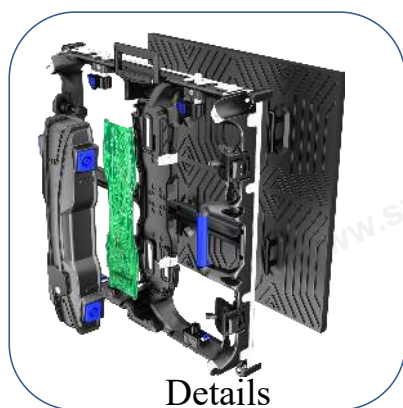

Details

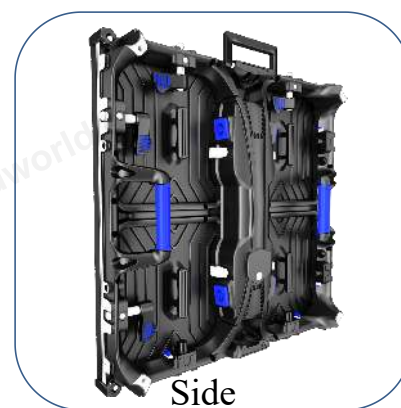

Side

### Features:

- Suitable for P2.976 indoor
- Modular control box easy for changing power supply and receiving card
- Magnetic module design to realize quick front and back service
- Location pins left and right for fast assembly
- LED module regardless of left and right
- Super thin, only 72mm thickness
- Power connectors & ethernet connectors are easy to assemble & disassemble



## Application:

Stage Performance    
  Conference    
  Celebration    
  banquet    
  exhibition

## Technical Specifications(RF500-P2.976 indoor):

Pixel Pitch	P2.97
LED type	SMD2121
Pixel configuration	3-in-1 SMD
Pixel density	112,896 pixels/m <sup>2</sup>
Module dimension(W*H)	250*250mm
Module resolution	84*84dots
Drive Method	1/21 scan
Maintenance	Front and back
Cabinet size (W*H)	500*500mm
Cabinet depth	72mm
Cabinet material	Aluminum
Cabinet weight	7.7kg/pcs
Brightness	≥1000 cd/m <sup>2</sup>
Best Viewing Distance	3m to 30m
Viewing Angle	140 * 140
Grey Level	14 Bit
Refresh Rate	≥1920HZ / 3840HZ
Power consumption(Avg.)	55w/cabinet
Power consumption(Max.)	160w/cabinet
Humidity-operating	10% ~ 95%
Operating Temperature	-20° - 50° C
Screen life	≥100000 hours
Controlling System	Sync or Async
Certificates	CE,RoHS,FCC,UL
Ingress Protection (IP)	IP31
Warranty	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.