


FAS2500 Series Indoor Full-Pre LED Display




Cabinet:

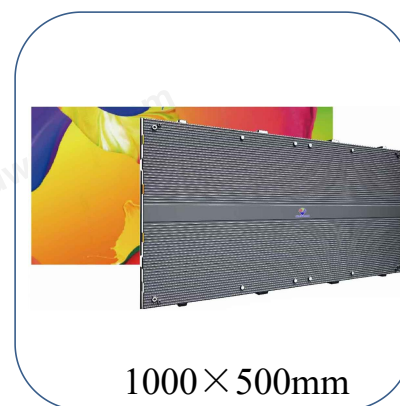

Features:

- It is an indoor LED display screen with full front maintenance;
- High accuracy;
- Support module magnetic suction;
- Installation: Crane girder hoisting and fixed installation;
- Suitable for P1.5625, P1.953, P2.604, P2.976, P3.91 and P4.81 pixel pitch;
- Light weight: 13.65kg ;
- Thin cabinet: 60mm ;
- It can be combined with 500X250mm/750X250mm/1000X250mm/500X500mm/1000X500mm.



Application:

☐ Store
 ☐ Conference
 ☐ Restaurant
 ☐ Classroom
 ☐ exhibition

Technical Specifications(FAS250 Series indoor):

Pixel Pitch	P1.5625	P1.953	P2.604	P2.97	P3.91	P4.81
LED type	SMD1010	SMD1515	SMD2121/1515	SMD2121	SMD2121	SMD2121
Pixel configuration	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3 in 1 SMD	3 in 1 SMD
Pixel density	409,600 pixels/m ²	262,144 pixels/m ²	147,456 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²	43,222 pixels/m ²
Module dimension(W*H)	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
Module resolution	160*160dots	128*128dots	96*96dots	84*84dots	64*64dots	52*52dots
Drive Method	1/40 scan	1/32 scan	1/32 scan	1/21 scan	1/16 scan	1/13 scan
Maintenance	front	front	front	front	front	front
Cabinet size (W*H)	1000X500mm	1000X500mm	1000X500mm	1000X500mm	1000X500mm	1000X500mm
Cabinet depth	60mm	60mm	60mm	60mm	60mm	60mm
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cabinet weight	13.65kg/pcs	13.65kg/pcs	13.65kg/pcs	13.65kg/pcs	13.65kg/pcs	13.65kg/pcs
Brightness	600cd/m ²	700 cd/m ²	800 cd/m ²	800 cd/m ²	800 cd/m ²	800 cd/m ²
Best Viewing Distance	1.5m to 15m	2 m to 20m	2.5m to 25m	3m to 30m	4m to 40m	5m to 50m
Viewing Angle	160 * 160	160 * 160	160 * 160	160 * 160	160 * 160	160 * 160
Grey Level	14~22bits	14~22bits	14~22bits	14~22bits	14~22bits	14~22bits
Refresh Rate	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ	7680HZ	7680HZ
Power consumption(Avg.)	120w/cabinet	120w/cabinet	120w/cabinet	120w/cabinet	120w/cabinet	120w/cabinet
Power consumption(Max.)	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet
Humidity-operating	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%
Operating Temperature	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C
Screen life	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours
Controlling System	Sync or Async	Sync or Async	Sync or Async	Sync or Async	Sync or Async	Sync or Async
Certificates	CE,RoHS,FCC,UL	CE,RoHS,FCC,UL	CE,RoHS,FCC,UL	CE,RoHS,FCC,UL	CE,RoHS,FCC,UL	CE,RoHS,FCC,UL
Ingress Protection (IP)	IP31	IP31	IP31	IP31	IP31	IP31
Warranty	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD. The above only lists one cabinet size of 1000*500mm. We also offer you the following options: 500*250mm, 500*500mm, 750*250mm, and 1000*250mm.