



FAH250 Series Indoor Full-Pre LED Display

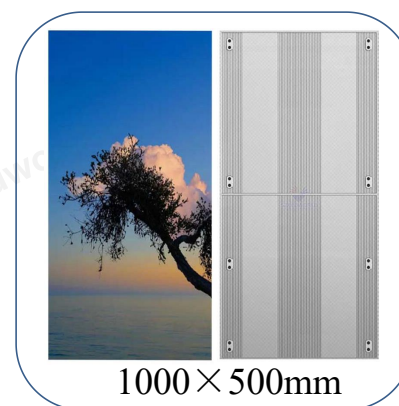

Cabinet:

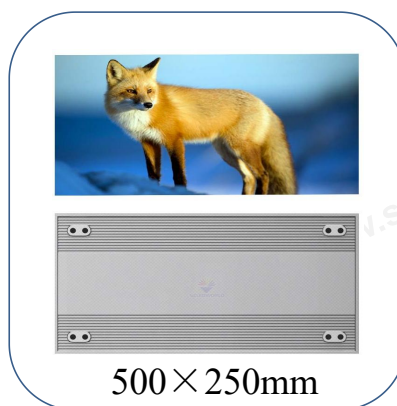

Features:

- It is an indoor LED display screen with full front maintenance;
- Hard Connection;
- Support module magnetic suction;
- Installation: Hanging, Establish, Wall-mounted installation and All-in-one installation;
- Suitable for P1.25, P1.5625, P1.953, P2.5, P2.604, P2.976, P3.91 pixel pitch;
- Light weight: 9.8kg ;
- Thin cabinet: 33mm ;
- It can be combined with 500*250mm/750*250mm/1000*250mm/500*500mm/750*500/1000*500mm.



Application:

☐ Store
 ☐ Conference
 ☐ Restaurant
 ☐ Classroom
 ☐ exhibition

Technical Specifications(FAH250 Series indoor):

Pixel Pitch	P1.25	P1.5625	P1.953	P2.5	P2.604	P2.97	P3.91
LED type	SMD1010	SMD1010	SMD1515	SMD1515	SMD2121/1515	SMD2121	SMD2121
Pixel configuration	3 in 1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3 in 1 SMD
Pixel density	640,000 pixels/m ²	409,600 pixels/m ²	262,144 pixels/m ²	160000pixels/m ²	147,456 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²
Module dimension(W*H)	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
Module resolution	200*200dots	160*160dots	128*128dots	100*100dots	96*96dots	84*84dots	64*64dots
Drive Method	1/50 scan	1/40 scan	1/32 scan	1/32 scan	1/32 scan	1/21 scan	1/16 scan
Maintenance	front	front	front	front	front	front	front
Cabinet size (W*H)	1000X500mm	1000X500mm	1000X500mm	1000X500mm	1000X500mm	1000X500mm	1000X500mm
Cabinet depth	33mm	33mm	33mm	33mm	33mm	33mm	33mm
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cabinet weight	9.8kg/pcs	9.8kg/pcs	9.8kg/pcs	9.8kg/pcs	9.8kg/pcs	9.8kg/pcs	9.8kg/pcs
Brightness	600 cd/m ²	600cd/m ²	700 cd/m ²	800 cd/m ²	800 cd/m ²	800 cd/m ²	800 cd/m ²
Best Viewing Distance	1.2m to 12m	1.5m to 15m	2 m to 20m	2.5 m to 25m	2.6m to 26m	3m to 30m	4m to 40m
Viewing Angle	160 * 160	160 * 160	160 * 160	160 * 160	160 * 160	160 * 160	160 * 160
Grey Level	14~16bits	14~16bits	14~16bits	14~16bits	14~16bits	14~16bits	14~16bits
Refresh Rate	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ
Power consumption(Avg.)	100-200w/cabinet	100-200w/cabinet	100-200w/cabinet	100-200w/cabinet	100-200w/cabinet	100-200w/cabinet	100-200w/cabinet
Power consumption(Max.)	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet	350w/cabinet
Humidity-operating	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%	10% ~ 95%
Operating Temperature	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C	-20° - 60° C
Screen life	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours	≥100000 hours
Controlling System	Sync or Async	Sync or Async	Sync or Async	Sync or Async	Sync or Async	Sync or Async	Sync or Async
Certificates	CE,RoHS,FCC,U L	CE,RoHS,FCC,U L	CE,RoHS,FCC,U L	CE,RoHS,FC C,UL	CE,RoHS,FC C,UL	CE,RoHS,FC C,UL	CE,RoHS,FC C,UL
Ingress Protection (IP)	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Warranty	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD. The above only lists one cabinet size of 1000*500mm. We also offer you the following options: 500*250mm, 500*500mm, 750*250mm, 750*500mm, and 1000*250mm.