

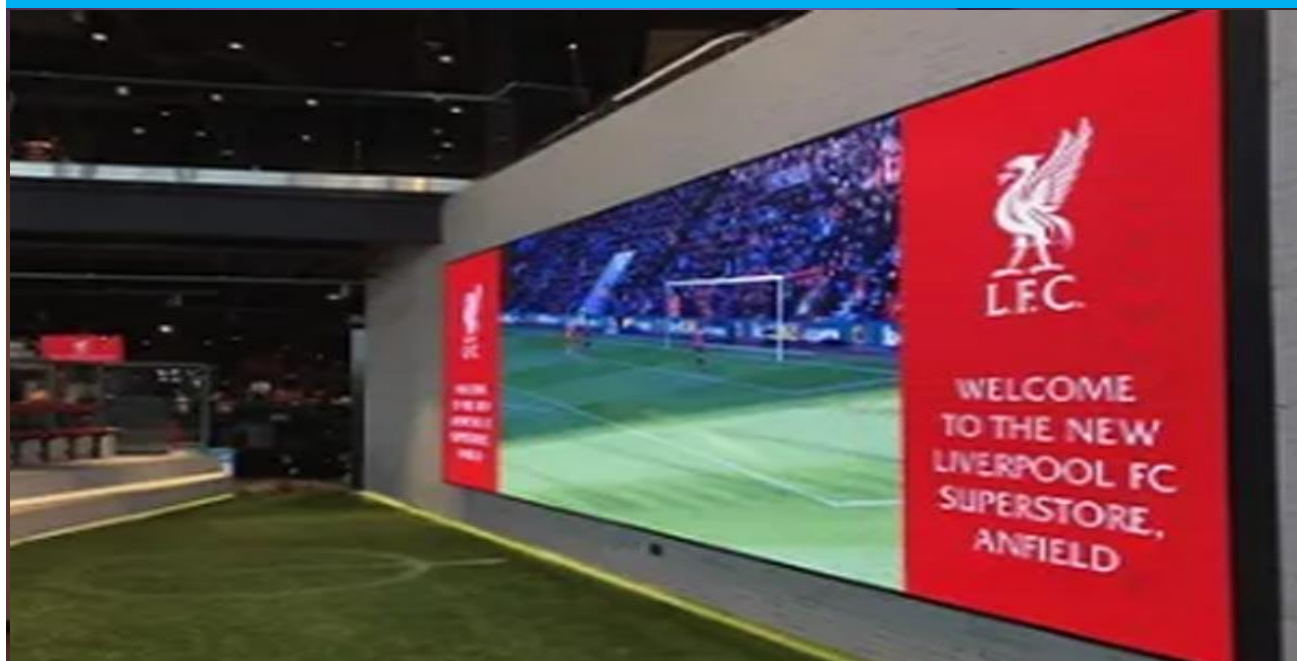


FAH320 Series Indoor Full-Pre LED Display


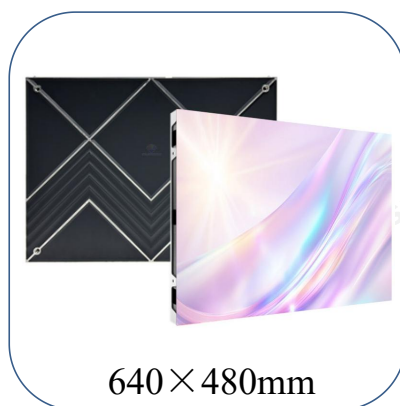


Cabinet:

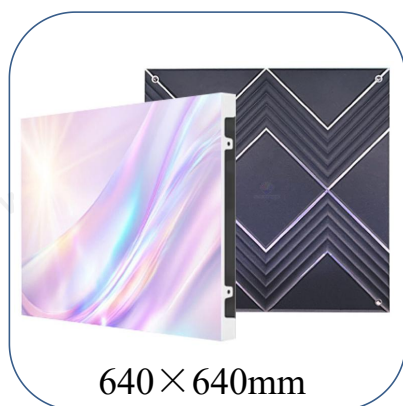

Features:

- Pixel pitch: P1.25, P1.53, P1.667,P1.86, P2, P2.5,P3.076;
- Hard connection;
- Front maintenance;
- Die-Cast Aluminum cabinet;
- 160° ultra-wide field of view;
- Light weight: 6.5kg(640×480mm) ;
- Thin cabinet: 49mm ;
- Hanging, Establishing, Eall-mounted installation, LED TV, and LED poster wall installation methods.



Application:

☐ Store
 ☐ Conference
 ☐ Living streaming room
 ☐ Lobby
 ☐ Station

Technical Specifications(FAH320 Series indoor):

Pixel Pitch	P1.25mm	P1.53mm	P1.667mm	P1.86mm	P2mm	P2.5mm	P3.076mm
LED type	SMD1010	SMD1212	SMD1212	SMD1515	SMD1515	SMD2121	SMD2121
Configuration	SMD 3-in-1	SMD 3-in-1	SMD 3-in-2	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1
Pixel Density	640,000	422,500	360,000	288,906	250,000	160,000	105,625
Module Size(mm)	320x160	320x160	320x161	320x160	320x160	320x160	320x160
Pixels/Module	256x128	208x104	192x96	172x86	160x80	128x64	104x52
Cabinet Size(mm)	640x480	640x480	640x480	640x480	640x480	640x480	640x480
Pixels/Cabinet	512x384	416×312	384×288	344×258	320x240	256x192	208x156
Cabinet Weight	6.5KG	6.5KG	6.5KG	6.5KG	6.5KG	6.5KG	6.5KG
Brightness	≥800nits	≥800nits	≥800nits	≥800nits	≥800nits	≥800nits	≥800nits
Viewing Distance	≥1.2m	≥1.5m	≥1.6m	≥1.8m	≥2m	≥2.5m	≥3m
Power Consumption	Max: 650	Max: 650	Max: 650	Max: 650	Max: 650	Max: 650	Max: 650
(W/m²)	Ave: 100~200	Ave: 100~200	Ave: 100~200	Ave: 100~200	Ave: 100~200	Ave: 100~200	Ave: 100~200
Driver Mode	1/64 scan	1/52 scan	1/48 Scan	1/43 scan	1/40 scan	1/32 scan	1/26 scan
Cabinet Material	Aluminum						
Refresh Rate	1920-3840Hz						
LED Life	>100,000 hours						
The rate	<0.0002						
Supply Voltage	AC220V/50HZ; AC110V/60HZ						
Operating Temperature	-10℃ ~ +60℃						
Operating Humidity	10% - 90%						
Viewing Angle	H: 160°; V: 160°						
Gray Scale	12-16bit						
Display Color	4096 Billion						
IP Rating	IP43						
Display Capability	Text, Graph and Video						
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.							