

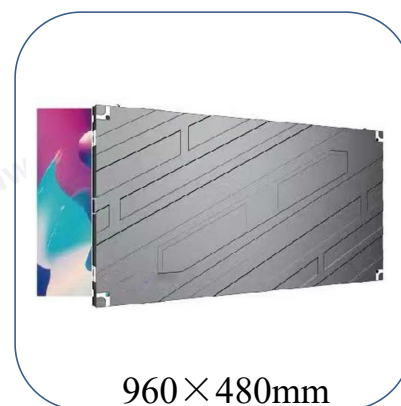


FAH320 Series Indoor LED Display

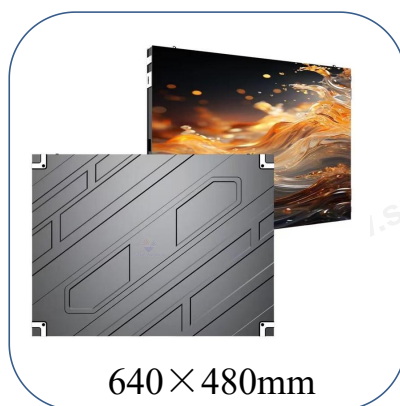


Cabinet:

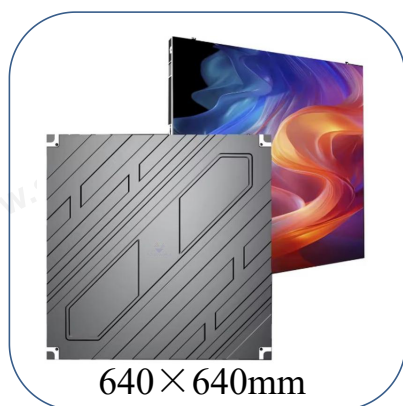

Features:

- Pixel pitch: P1.25, P1.53, P1.86, P2, P2.5, P3.076, P4, P5;
- Cabinet Sizes: 640x640mm, 640x480mm, 320x480mm, 640x320mm, 320x160mm, 320x640mm, 960x480mm;
- Front maintenance;
- Die-Cast Aluminum cabinet;
- No fan cooling, no noise when working;
- Light weight: 6.8kg(640 × 640mm) ;
- Thin cabinet: 44mm ;
- The standard installation structure can be selected.



Application:

☐ Store
 ☐ Conference
 ☐ Living streaming room
 ☐ Lobby
 ☐ Station

Technical Specifications(FAS320 Series Indoor):

Pixel Pitch	P1.25mm	P1.53mm	P1.66mm	P1.86mm	P2mm	P2.5mm	P3.076mm	P4mm	P5mm
LED type	SMD1010	SMD1010	SMD1010	SMD1515	SMD1515	SMD2121	SMD2121	SMD2121	SMD2121
Configuration	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1	SMD 3-in-1
Pixel Density	640,000	422,500	360,000	288,906	250,000	160,000	105,625	62,500	40,000
Module Size(mm)	320x160	320x160	320x160	320x160	320x160	320x160	320x160	320x160	320x160
Pixels/Module	256x128	208x104	192x96	172x86	160x80	128x64	104x52	80x40	64x32
Cabinet Size(mm)	640x640	640x640	640x640	640x640	640x640	640x640	640x640	640x640	640x640
Pixels/Cabinet	512x512	416x416	384x384	344x344	320x320	256x256	208x208	160x160	128x128
Cabinet Weight	6.8KG	6.8KG	6.8KG	6.8KG	6.8KG	6.8KG	6.8KG	6.8KG	6.8KG
Brightness	600~800nits	600~800nits	600~800nits	600~800nits	600~800nits	600~800nits	600~800nits	600~800nits	600~800nits
Viewing Distance	>1.2m	>1.5m	>1.6m	>1.8m	>2m	>2.5m	>3m	>4m	>5m
Power Consumption	Max: 650	Max: 650	Max: 650	Max: 650	Max: 650	Max: 500	Max: 9876	Max: 730	Max: 480
(W/m²)	Ave: 218	Ave: 218	Ave: 218	Ave: 218	Ave: 218	Ave: 170	Ave: 325	Ave: 240	Ave: 160
Driver Mode	1/64 scan	1/52 scan	1/48 scan	1/43 scan	1/40 scan	1/32 scan	1/26 scan	1/20 scan	1/16 scan
Cabinet Material	Aluminum								
Refresh Rate	3840Hz ~7680Hz								
LED Life	100,000 hours								
Supply Voltage	AC220V/50HZ; AC110V/60HZ								
Operating Temperature	-20℃ ~ +40℃								
Operating Humidity	10% - 90%								
Viewing Angle	H: 120°; V: 120°								
Gray Scale	Red, Green and Blue each 16K								
Display Color	4096 Billion								
IP Rating	IP20								
Display Capability	Text, Graph and Video								
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.									