


Outdoor Smart Pole LED Display





Module & cabinet:

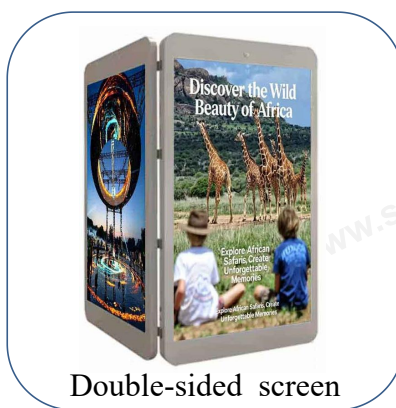

Features:

- Pixel pitch: P2.5, P3.0, P3.3, P4, P5, P6 ect.;
- Cabinet Size: standard size 640*1280 mm or customized;
- LED cabinet materials: Iron and aluminum;
- Side-open and back-open maintenance;
- Intelligent remote control system;
- IP65 high protection rating;
- Brightness: 5500~10000nits ;
- Customizable split double-sided pole LED screen;



Application:

☐ Airport ☐ Market ☐ Grogshop ☐ High-speed rail station ☐ Offices ☐ 4S shop
☐ Shopping Guide ☐ convention center ☐ bank

Technical Specifications(Pole LED Display):

Pixel Pitch	P2.5	P3.076	P3.33	P4	P5	P6.67
LED type	SMD1415	SMD1415	SMD1921	SMD 1921	SMD 1921	SMD 2727
Pixel configuration	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Pixel density	160,000pixels/m²	105,625 pixels/m²	90,000 pixels/m²	62,500 pixels/m²	40,000 pixels/m²	22,500 pixels/m²
Module dimension (W*H)	320*160mm	320*160mm	320*160mm	320*160mm	320*160mm	320*160mm
Module resolution	128*64dots	104*52dots	96*48dots	80*40dots	64*32dots	48*24dots
Drive Method	1/16 scan	1/13 scan	1/12 scan	1/10 scan	1/8 scan	1/6 scan
Cabinet size (W*H)	640*1280mm or Customized	640*1280mm or Customized	640*1280mm or Customized	640*1280mm or Customized	640*1280mm or Customized	640*1280mm or Customized
Cabinet depth	136mm	136mm	136mm	136mm	136mm	136mm
Cabinet material	Iron or aluminum	Iron or aluminum	Iron or aluminum	Iron or aluminum	Iron or aluminum	Iron or aluminum
Cabinet weight	34kg/pcs	34kg/pcs	34kg/pcs	34kg/pcs	34kg/pcs	34kg/pcs
Brightness	≥5500 cd/m2	≥5500 cd/m2	≥5500 cd/m2	≥5500 cd/m2	≥5500 cd/m2	≥5500 cd/m2
Best Viewing Distance	2.5m to 25m	3m to 30m	3m to 30m	4m to 40m	5m to 50m	6m to 60m
Power consumption (Avg.)	260 w/cabinet	260 w/cabinet	260 w/cabinet	300w/cabinet	300w/cabinet	300w/cabinet
Power consumption (Max.)	900 w/cabinet	800 w/cabinet	800 w/cabinet	800w/cabinet	800w/cabinet	800w/cabinet
Viewing Angle	140 * 140					
Grey Level	14 Bit					
Refresh Rate	3840HZ~7680Hz					
Humidity-operating	10% ~ 95%					
Operating Temperature	-20° - 50° C					
Screen life	≥100000 hours					
Controlling System	Sync or Async					
Certificates	CE, RoHS, FCC, UL					
Ingress Protection (IP)	IP65					
Warranty	2 Years					
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD .						