



Transparent Film LED Screen

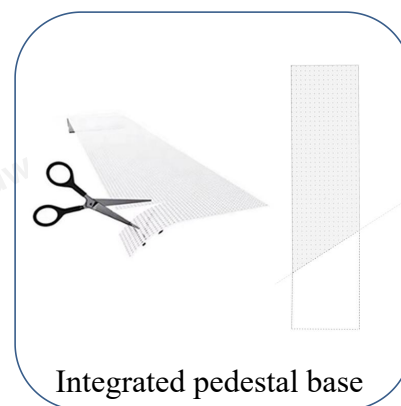

Cabinet:

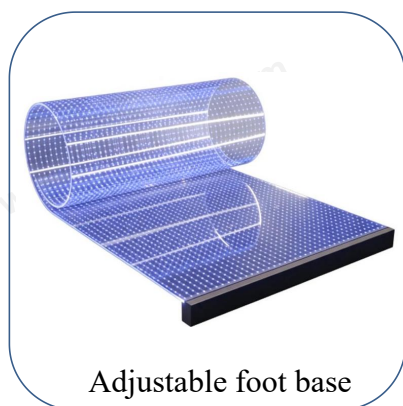

Features:

- Pixel pitch: P4,P5,P6, P8,P10,P20;
- Flexible & bendable;
- 90% light transmittance;
- Ultra-light and ultra-thin;
- Self-adhesive installation;
- 140° wide-angle view;
- Can be cut to size;
- Drop-resistant and impact-resistant.



Application:

○ Retail Storefront Windows ○ Shopping Malls ○ Glass Curtain Wall Buildings ○ Restaurants & Cafés

Technical Specifications(Transparent Film LED Screen):

Item	P4	P5	P6	P8	P10	P20
Module Size (mm)	1000*240	1000*240	1000*240	1000*240	1000*240	1000*240
Module Resolution (pixels)	250*60	200*48	166*40	125*30	100*24	50*12
Pixel Density (pixels/m²)	250*250	200*200	166*166	125*125	100*100	50*50
LED Lamp Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Brightness	1500 cd/m²	1500 cd/m²	2500 cd/m²	2500 cd/m²	3000 cd/m²	1200 cd/m²
Transmittance	90%	90%	93%	93%	93%	95%
Refresh Rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Peak Power Consumption	720 W/m²	720 W/m²	720 W/m²	720 W/m²	720 W/m²	720 W/m²
Average Power Consumption	260 W/m²	260 W/m²	260 W/m²	260 W/m²	260 W/m²	260 W/m²
Operating Environment	Temp: -0~55℃Humidity: 10~75% RH					
Service Life	100,000 Hours					
Driving Mode	Static Drive					
Gray Scale	16 bit					
Control System	Nova / Colorlight					
Input Voltage	AC 110-240V, 50/60Hz					
Viewing Angle	160°					
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.						