
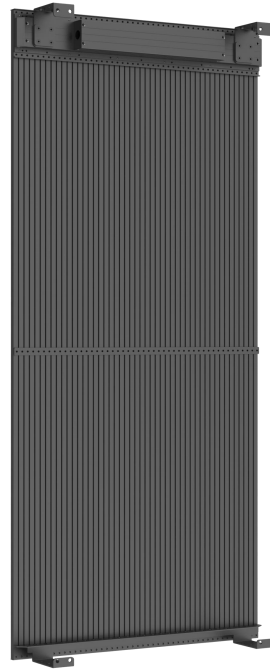


The specification of CD15.625-31.25 curtain LED screen for outdoor DIP series

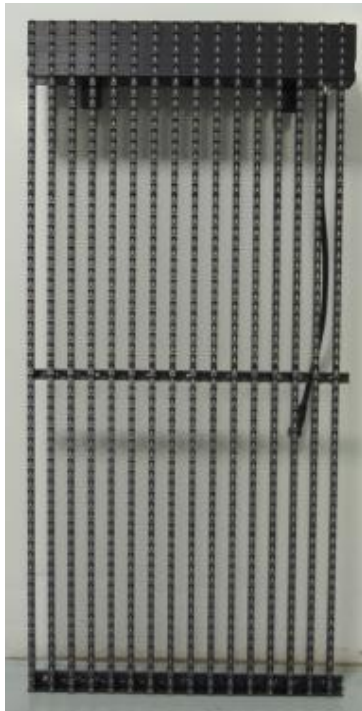


Screen specification parameter



Item	Unit	Parameter
Type of product		CD15-31
Pixel pitch	mm	Horizontal 31.25 Vertical 15.625
Pixel composition	DIP	346 (1R1G1B)
Resolution	dot/m ²	2048
Unit cabinet size	mm	500(W) X 1000(H)
Unit cabinet pixels	dot	1024
Unit cabinet resolution	dot	16(W) X 64(H)
Unit cabinet weight	kg/个	7.5
Cabinet weight	kg/m ²	15
Unit cabinet thickness	cm	6.7
Max consumption	W/m ²	560
Average consumption	W/m ²	130

Screen brightness	CD/m²	≥7000cd
Gray lever	bit	14
Color temperature	K	6500-9300k
Brightness adjustment	degree	0-255
View angle	°	Horizontal ≥110° vertical ≥70°
The best view distance	m	25-500
Frame rates	Hz	60
Control mode		Synchronous mapping / Asynchronous control
Drive mode		Constant current,static
Power source voltage	AC V	85-250
Life span		100000 hours
Cooling mode		structure-enhanced,natural convection
Strip width	mm	9.8
Strip material		aluminum 6061
Transparent rate	%	70%
IP rate	IP	Double-side IP65
Operating / Storage Temperature	°C	-35 ~ + 80°C / -55 ~ + 120°C
Installation type		quick installation Tool-free
Fire resistance		Full V0 flame retardant
Maintain speed		10S / unit
Maintain mode		Front side and Back side

Product Details Display

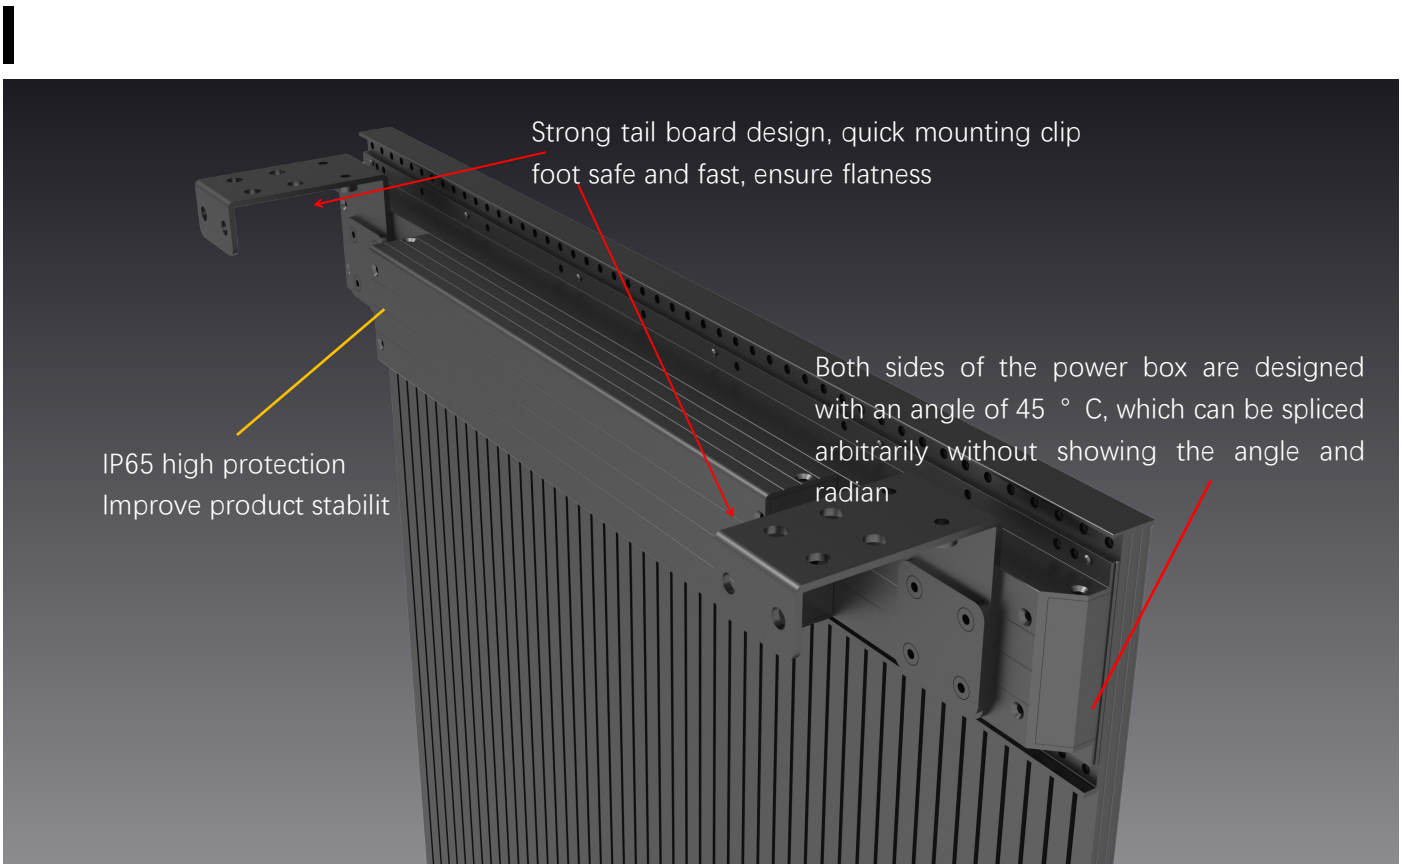

Unique heat sink design
speed up the heat conduction
so that L ED mesh is stable operation

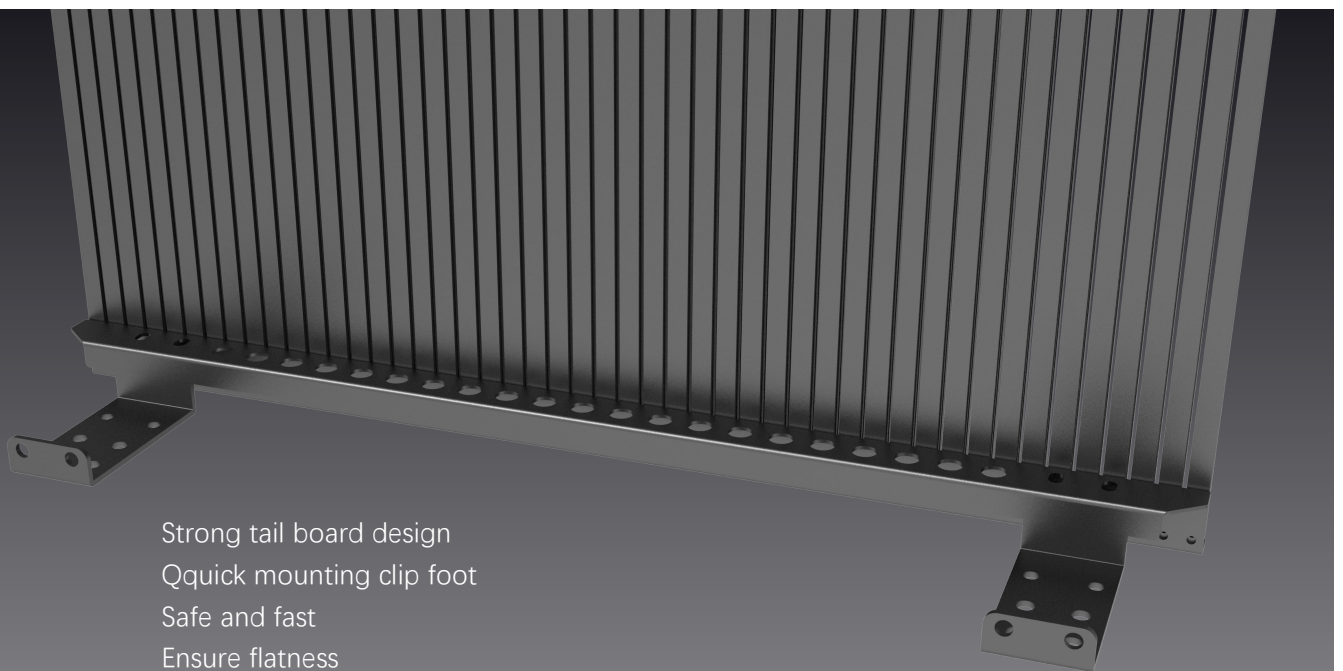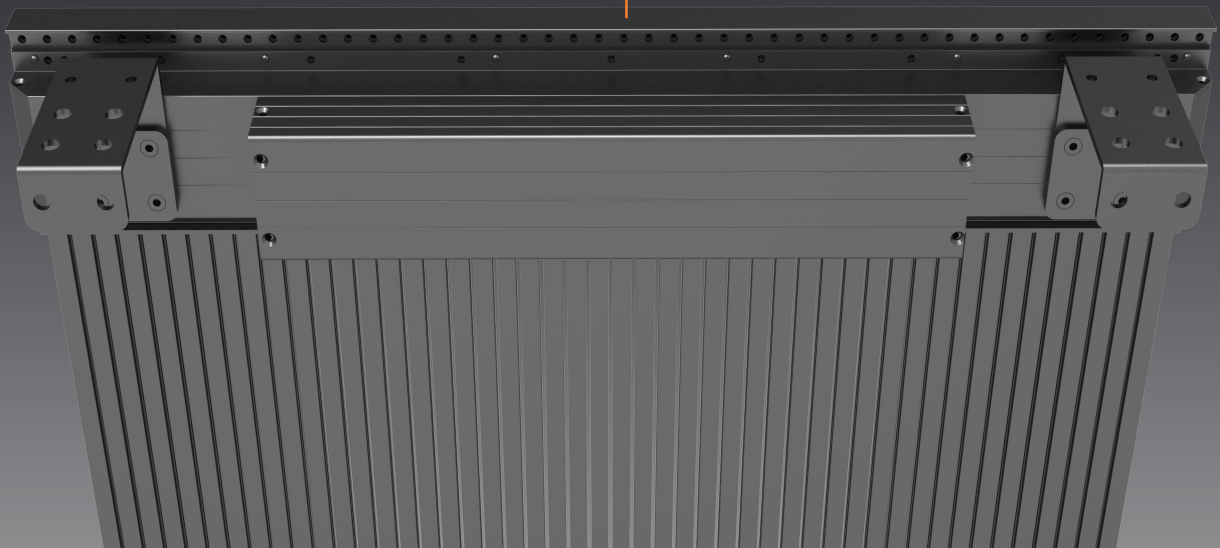

Strong tail board design
Quick mounting clip foot
Safe and fast
Ensure flatness


Product Installation Diagram




1.Install the steel frame horizontally on the wall according to the installation construction drawing.




2.Install the grille screen box from bottom to top

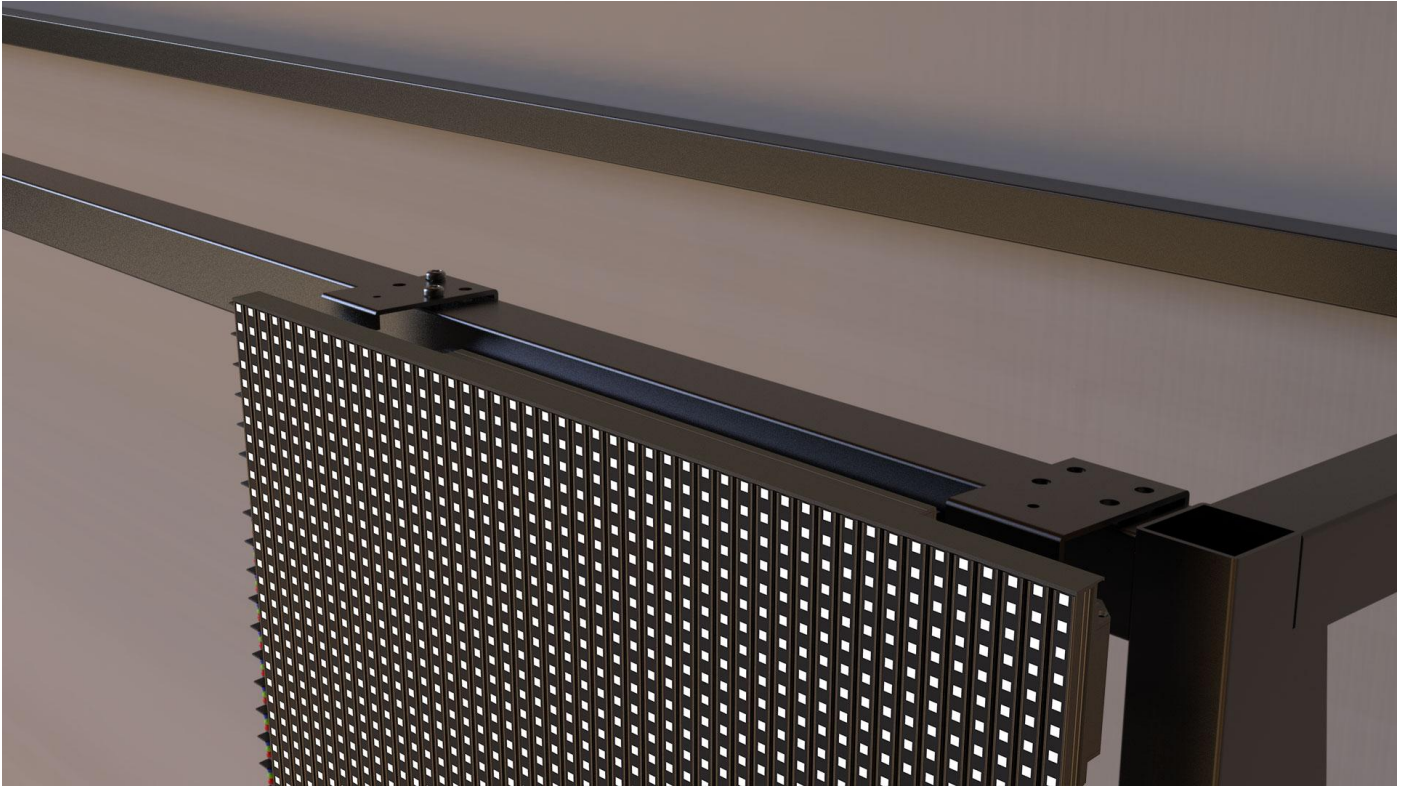


3. Use self-tapping screws to fix the holes on the top of the grille screen.

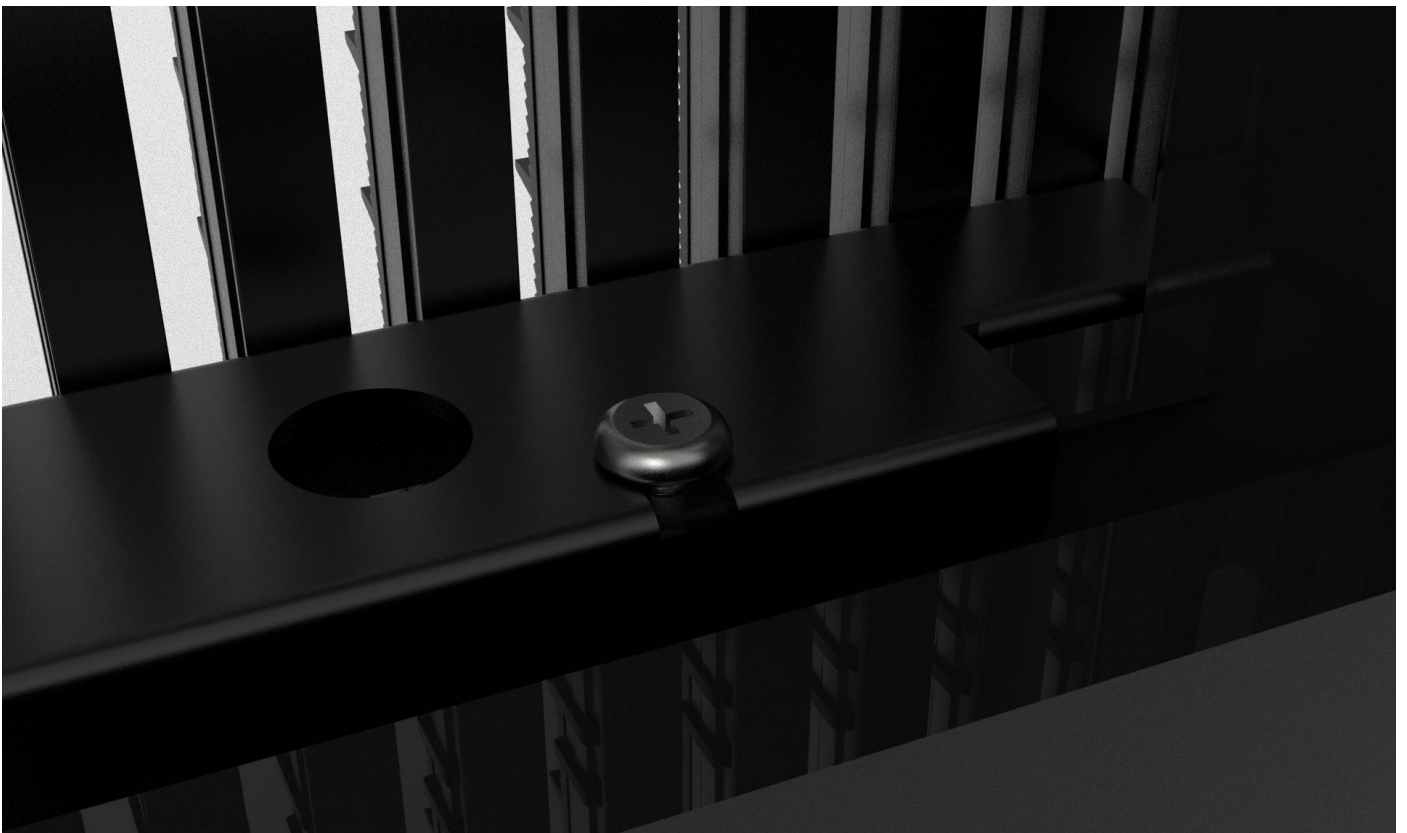

4. Use self-tapping screws to fix the holes under the grille screen box.

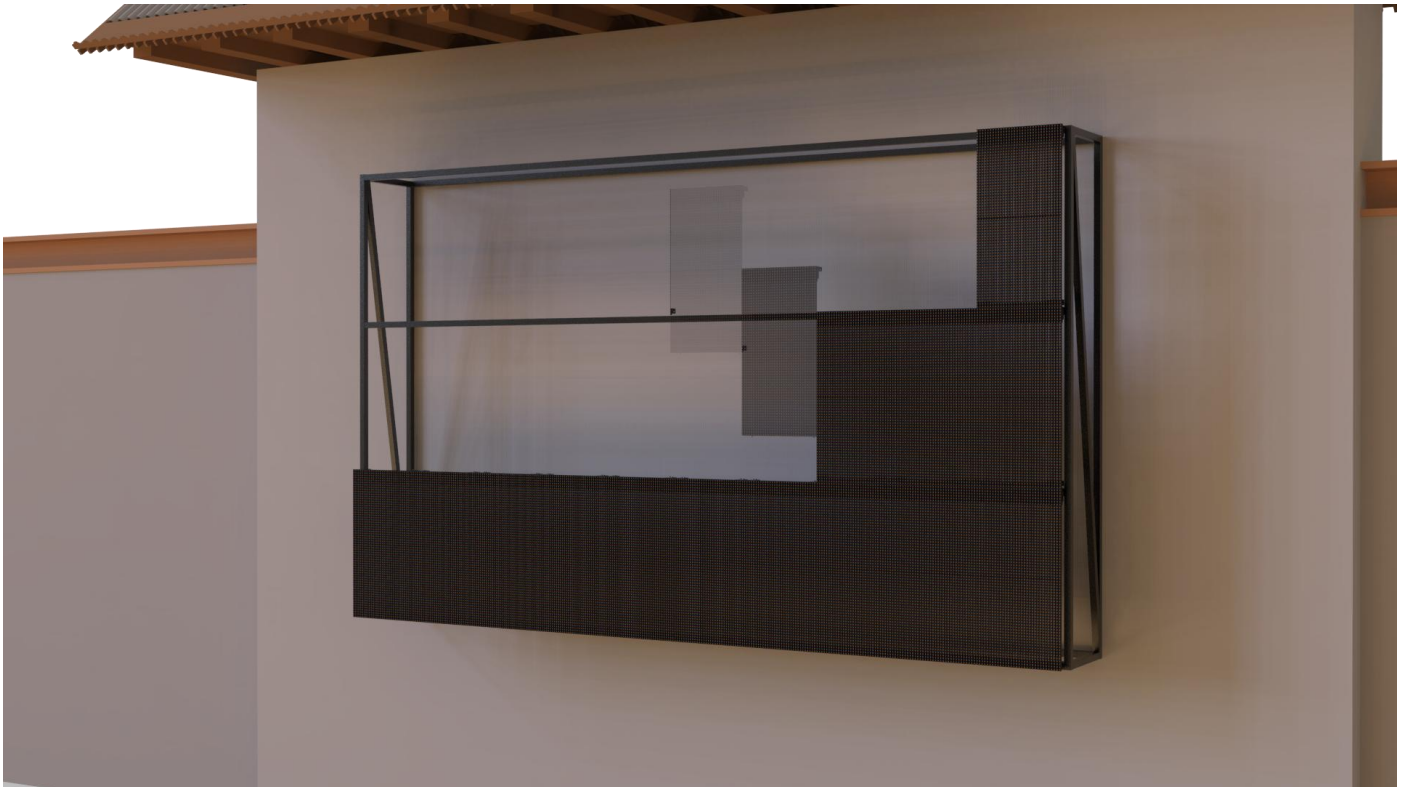


5.Install the remaining grille screen cabinets in sequence.

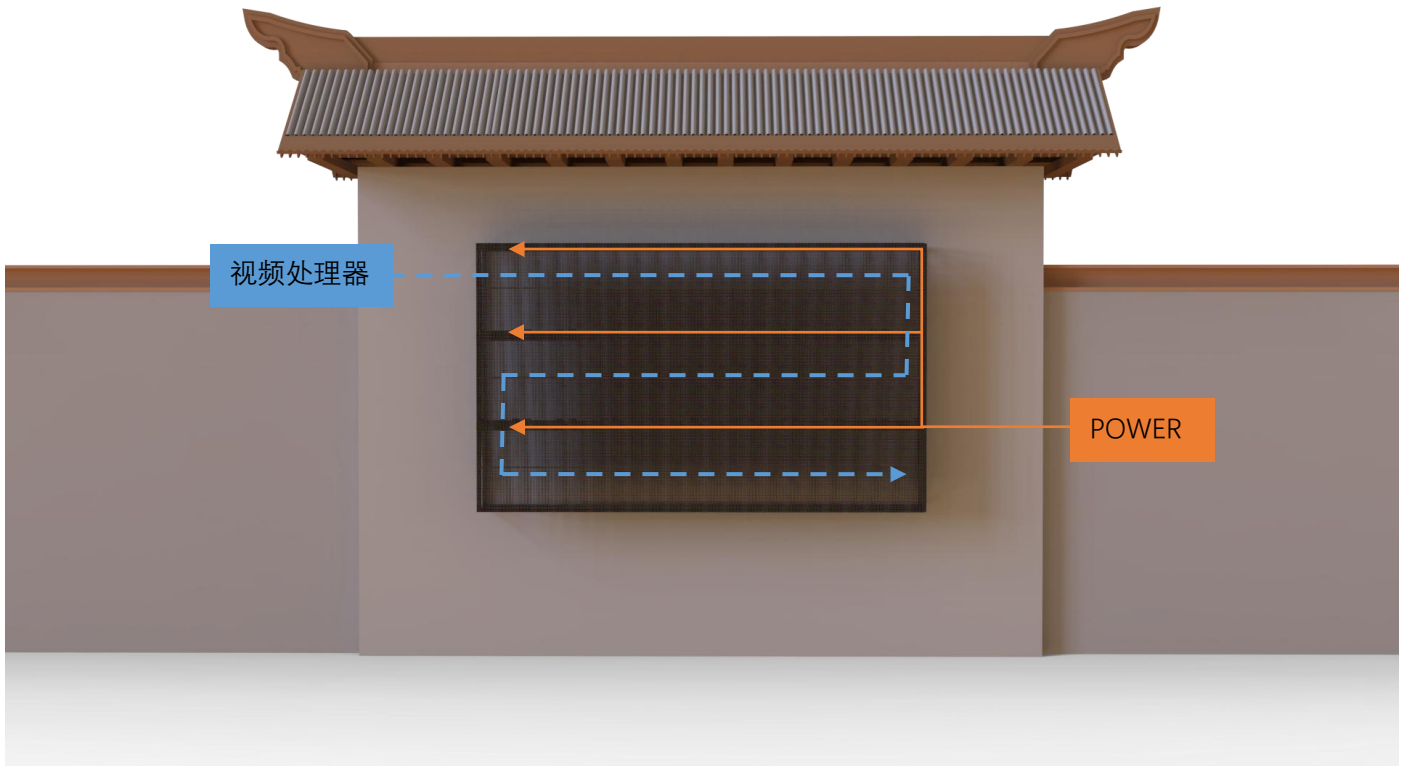

6. Connect the power cable and network cable to complete the installation.
(For details, see the product installation manual and installation video)

Product Details

P10

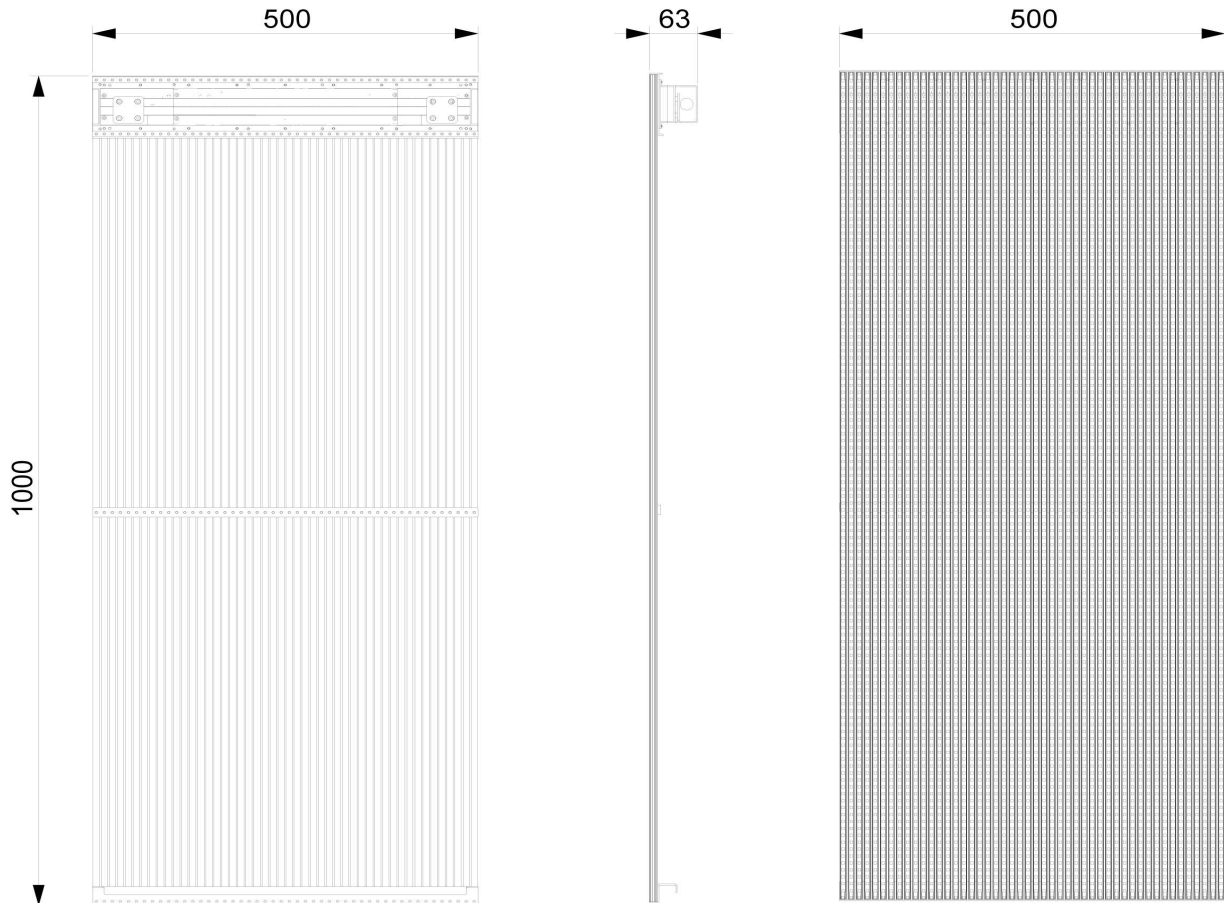

Product features

