


LRI2.6 indoor rental led display



Cabinets:

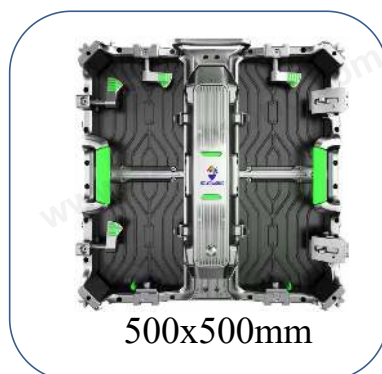

Features:

- 500x500mm and 500x1000mm cabinets can be assembled together
- LED modules can be magnetically installed and removed;
- Tool-free assembly and disassembly;
- Stable structure and performance;
- Compatible with curved lock;
- Light weight: 6.5kg;
- Thin cabinet: 71.5mm ;
- Fast maintenance;



Application:

Stage Performance
 church
 wedding
 anniversary celebration
 exhibition
 banquet

Technical Specifications:

Pixel Pitch	P2.6
Model	LRI 2.6
LED type	SMD2121
Pixel configuration	3 in 1 SMD
Pixel density	147,456 pixels/m ²
Module dimension(W*H)	250*250mm
Module resolution	96*96dots
Drive Method	1/32 scan
Maintenance	back
Cabinet size (W*H)	500*500mm / 500*1000mm
Cabinet resolution	192*192 dots / 192*384 dots
Cabinet depth	71.5mm
Cabinet material	Aluminum
Cabinet weight	6.5 kg/pcs / 11.5 kg/pcs
SQM / cabinet	0.25 sqm / 0.5 sqm
Brightness	800 cd/m ²
Color temperature	6500deg. K
Best Viewing Distance	2.5m to 25m
Viewing Angle	140 * 140
Grey Level	14 Bit
Refresh Rate	≥3840Hz
Video frame rate	60Hz
Power consumption(Avg.)	65w/cabinet / 130w/cabinet
Power consumption(Max.)	200w/cabinet / 400w/cabinet
Input voltage (nominal)	110 or 220VAC
Humidity-operating	10% ~ 95%
Operating Temperature	-20° - 50° C
Screen life	≥100000 hours
Input interface	DVI, VGA, HDMI, DP, SDI etc.
Control system	Novastar, colorlight, linsn, HD etc.
Certificates	CE,RoHS,FCC,UL
Ingress Protection (IP)	Front IP65
Warranty	2 Years

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.